




PCT/GB 00/088827  
10/088827

INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

GB00/3644

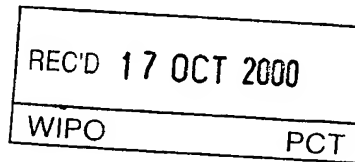

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ


4

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

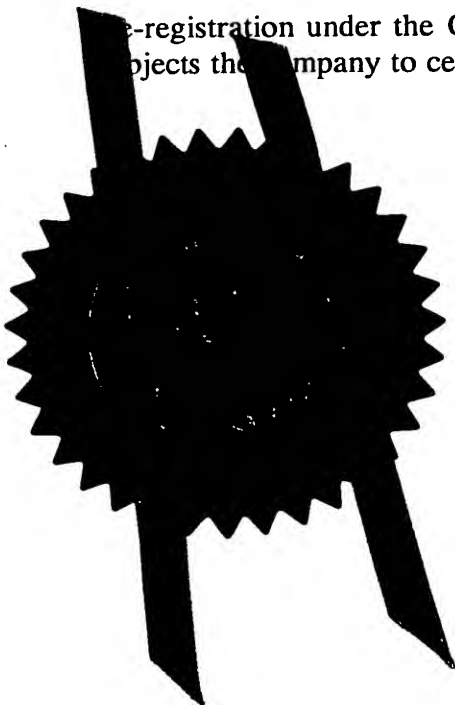


Signed

*MRL*

Dated

2 OCT 2000

Patents Act 1977  
(Rule 16)



The  
Patent  
Office

03SEP99 E478722-1 006256  
P01/7700 01 The Patent Office

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	P/61834.GBA/VJC		
2. Patent application number (The Patent Office will fill in this part)	<b>9922421.4</b>		<b>23 SEP 1999</b>
3. Full name, address and postcode of the or of each applicant (underline all surnames) Patents ADP number (if you know it)	VIDEOJET SYSTEMS INTERNATIONAL, INC. 1500 MITTEL BOULEVARD WOOD DALE IL 60191-1073 USA  DELAWARE, USA <i>6596381001 069724001</i>		
If the applicant is a corporate body, give the country/state of its incorporation			
4. Title of the invention	A DROPLET GENERATOR FOR A CONTINUOUS STREAM INK JET PRINT HEAD		
5. Name of your agent (if you have one)	N. G. McGOWAN		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	GEC PATENT DEPARTMENT WATERHOUSE LANE CHELMSFORD ESSEX CM1 2QX		
Patents ADP number (if you know it)	<i>6944235001</i>		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description (10)

Claim(s) (2)

Abstract (-)

Drawing(s) (5) 15 1/2

10. If you are also filing any of the following,  
state how many against each item.

Priority documents (-)

Translations of priority documents (-)

Statement of inventorship and right  
to grant of a patent (Patents Form 7/77) (-)

Request for preliminary examination  
and search (Patents Form 9/77) (1)

Request for substantive examination  
(Patents Form 10/77) (-)

Any other documents  
(please specify) (-)

11. I/We request the grant of a patent on the basis of this application.

Signature

N. G. McGOWAN

AGENT FOR THE APPLICANTS

Date 21/09/99

12. Name and daytime telephone number of  
person to contact in the United Kingdom

N. G. McGOWAN

01245 275153

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

A Droplet Generator for a Continuous Stream Ink Jet Print Head

This invention relates to a droplet generator for a continuous stream ink jet print head.

More particularly the invention relates to such a generator comprising: an elongate  
5 cavity for containing the ink; nozzle orifices in a wall of said cavity for passing ink from  
the cavity to form jets, said nozzle orifices extending along the length of said cavity; and  
actuator means disposed on the opposite side of said cavity to said wall for vibrating the ink  
in said cavity such that each said jet breaks up into ink droplets, in operation of said  
generator a standing wave being present in the ink in said cavity.

10 An example of a generator as described in the preceding paragraph is disclosed in  
US-A-5,502,473. The generator of US-A-5,502,473 is designed to operate at, or very close  
to, a frequency at which its ink cavity is resonant in the vertical direction, i.e. from the  
actuator means to the nozzle orifices. This requires a very high accuracy in the physical  
dimensions of the structural components of the generator. It also permits very little stray in  
15 operating parameters of the generator such as ink composition and temperature.

US-A-4,827,287 discloses a droplet generator for a continuous stream ink jet print  
head. In this generator, in order to achieve the required jet break up, a travelling wave is  
caused to travel along an elongate nozzle orifice containing plate by means of the direct  
physical vibration of one end of the plate. The area of the plate free to vibrate is narrowed  
20 in the direction of wave propagation to compensate for attenuative losses. US-A-4,827,287  
uses what is called a waveguided construction.

According to the present invention there is provided a droplet generator for a

continuous stream ink jet print head comprising: an elongate cavity for containing the ink; nozzle orifices in a wall of said cavity for passing ink from the cavity to form jets, said nozzle orifices extending along the length of said cavity; and actuator means disposed on the opposite side of said cavity to said wall for vibrating the ink in said cavity such that each  
5 said jet breaks up into ink droplets, in operation of said generator a standing wave being present in the ink in said cavity, characterised in that the cross-sectional area of said cavity varies along its length in a manner so as to tailor the form of said standing wave in the cavity such that each said jet breaks up into ink droplets at a respective predetermined distance from said wall of the cavity.

10        Preferably, the tailoring of the form of said standing wave is such that each said jet breaks up into ink droplets at substantially the same predetermined distance from said wall of the cavity.

          Preferably, in the case of the preceding paragraph, the cross-sectional area of the cavity varies cyclically along its length between minimum and maximum values, said cross-  
15 sectional area having a minimum value whereat said standing wave has a region of low acoustic pressure at the nozzle orifices, said cross-sectional area having a maximum value whereat said standing wave has a region of high acoustic pressure at the nozzle orifices. The cyclical variation is for example sinusoidal.

          In the case of each of the preceding two paragraphs, the cavity suitably has a  
20 generally triangular or a generally rectangular cross-section.

          The invention also provides a method of operating a generator according to each of the preceding three paragraphs wherein the parameters of the operation of the generator are permitted to stray such that said cavity operates over a range extending substantially all the

way between two successive resonances in the length of the cavity. Typically the parameters of the operation permitted to stray are ink composition and temperature.

The invention further provides a method of operating a generator according to each of the aforementioned three paragraphs wherein the cavity operates at substantially midway  
5 between two successive resonances in the length of the cavity.

A droplet generator in accordance with the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is an end view of the generator;

Figure 2 is a side view of the generator;

10 Figures 3a) and 3b) are plan and perspective views respectively of an elongate ink cavity of the generator;

Figures 4a) and 4b) illustrate respectively the ink cavity's minimum and maximum cross-sectional area;

Figure 5 is a perspective view of a known elongate ink cavity;

15 Figure 6 is a cross-section of the known ink cavity;

Figure 7 illustrates, at each of a series of operating frequencies, contours of peak acoustic pressure within a plane extending along the known ink cavity;

Figure 8 compares ink cavity peak acoustic pressure when using the known ink cavity of Figures 5 and 6 to that when using the ink cavity of Figures 3 and 4; and

20 Figure 9 is a perspective view of an alternative ink cavity according to the present invention.

Referring to Figures 1 and 2, the generator comprises a polyetheretherketone manifold 1, and, push fitted therein, an actuator 3 and a nozzle carrier 5. Actuator 3

comprises a piezoelectric driver 9, a stainless steel head 11 and a brass backing member 6. Nozzle carrier 5 comprises a stainless steel element 2 defining therein a 'V' cross section channel, and, bonded to element 2, a stainless steel foil sheet 10. Sheet 10 contains a line of nozzle orifices 7, and is so bonded to element 2 that this line runs along the length of the open apex of the 'V' cross section channel of element 2.

An elongate ink cavity 13 is defined by the lower face 15 of actuator 3 and interior faces 17, 19 of element 2 which define the 'V' cross section channel of element 2. Actuator 3 runs the length of cavity 13 and overlaps the ends and sides of cavity 13 at 31 and 33 respectively. A narrow gap 20 is present on either side of head 11 of actuator 3 between it and manifold 1. 'O' rings 21 seal against the further egression of ink from cavity 13 and gaps 20. Thus, piezoelectric driver 9 is sealed from contact with the ink. Channels (not shown) are provided in manifold 1 and communicate with gaps 20 for the supply of ink to cavity 13 and the bleeding of air/ink from cavity 13.

At the frequency of operation of the generator, actuator 3 has a vertical thickness resonance at which all points across the lower face 15 of actuator 3 vibrate vertically in phase and with the same amplitude, i.e. at which lower face 15 is driven in contact with the ink in cavity 13 in piston-like manner.

Cavity 13 is shaped so as to provide a steady and essentially unidirectional flow of ink to nozzle orifices 7. The reducing surface area in the direction of wave travel (i.e. from lower face 15 of actuator 3 to nozzle orifices 7) causes an increased acoustic pressure at the apex of the 'V' cross-section channel as compared to that at lower face 15.

Referring now also to Figures 3 and 4, interior faces 17, 19 of element 2 undulate sinusoidally in synchronism thereby to produce a 'V' cross-section body of ink 49 in cavity

13 having correspondingly undulating sides 51, 53, as shown in Figures 3 and 4. The undulation is greatest at the tops 55 of the sides 51, 53 and gradually reduces in the direction of the apex 57 of the 'V' to peter to zero thereat. The effect of the undulation is that the cross-sectional area of the elongate body of ink 49 varies cyclically along its length  
5 between minimum (Figure 4a)) and maximum (Figure 4b)) values. The varying cross-sectional area of ink cavity 13 will be discussed further below.

At the frequency of operation of the generator of Figures 1 and 2, cavity 13 is non-resonant in the vertical direction, i.e. from lower face 15 of actuator 3 to line of nozzle orifices 7. This facilitates a relaxation in the required accuracy of the physical dimensions  
10 of the structural components of the generator. It also permits greater stray in operating parameters of the generator such as ink composition and temperature.

It is to be appreciated that if cavity 13 were to be designed to be resonant in the vertical direction, then it would be necessary at operating frequency for an integer number of half wavelengths to fit precisely in this vertical direction between lower face 15 of  
15 actuator 3 and line of nozzle orifices 7. A pure standing wave, extending in the vertical direction, would then be established. Thus, the acoustic pressure along line of nozzle orifices 7 would be the same, with the desirable result that the jets emanating from the orifices would break up into ink droplets at the same predetermined distance from the orifices. Such an arrangement, although advantageous in that uniform jet break up is  
20 conveniently achieved, is disadvantageous in that it is highly sensitive to inaccuracy in the structural dimensions and operating parameters of the generator.

Cavity 13 is also non-resonant along its length in operation of the generator. Thus, at operating frequency, an integer number of half wavelengths does not precisely fit into the



length of cavity 13, and therefore a pure standing wave is not established which extends along cavity 13. Resonances along the length of cavity 13, so called resonance length modes, obviously occur at a series of frequencies. Thus, it is necessary that the generator be operated at a frequency that is between two successive length modes. It is to be understood that it would not be desirable to operate at a length mode frequency, since the acoustic pressure along line of nozzle orifices 7 would vary greatly. This variation would correspond to the nodes and antinodes of the established pure standing wave, and result in non-uniform jet break up. Clearly, operation is ideally midway between two successive length modes.

10       As aforesaid, cavity 13 is operated at a frequency between two length modes. A standing wave is established in cavity 13, but not a pure standing wave as mentioned previously. The standing wave established is a partial standing wave, and is the resultant wave generated by multiple reflections at the walls of cavity 13. There will be further below discussion of the operation of the ink cavity of Figures 3 and 4.

15       Turning now to the known ink cavity of Figures 5 and 6, this ink cavity is the same as that shown in Figures 3 and 4 with the exception that its walls 61, 63 do not undulate but are flat and planar in form. Thus, the cross-sectional area of the known ink cavity does not vary but remains the same along its length. Figures 4a), 4b) and 6 are drawn to the same scale, thereby enabling comparison between the minimum and maximum cross-sectional areas of the body of ink 49 in cavity 13 and the cross-sectional area of the body of ink 65 in the known ink cavity.

Acoustic pressure variation within the known ink cavity will now be considered at each of a number of operating frequencies. In Figure 7 each plot is of contours of peak

acoustic pressure, at a given operating frequency, within plane A drawn in Figure 6, which plane extends into the paper in Figure 6. Considering the 88 kHz plot, the 'peaks' 71 along the line of nozzle orifices represent regions of high acoustic pressure, and the 'troughs' 73 between peaks 71 represent regions of low acoustic pressure. It can be seen that the acoustic pressure along the nozzle orifices varies greatly, resulting in non-uniform jet break up. This is also so in the case of the plots at all other seven frequencies. Thus, satisfactory operation, i.e. uniform jet break up, is not achieved with the known ink cavity at the operating frequencies of Figure 7.

A length mode resonance occurs at 91 kHz. Thus, at 91 kHz a pure standing wave is established in the ink cavity. At the other seven frequencies a partial standing wave is established. An important feature to note is that both above and below 91 kHz, the regions of high and low acoustic pressure occur at the same spatial positions along the line of nozzle orifices. Thus, at 88 and 90 kHz the highs and lows occur at the same spatial positions. Similarly, at 92, 94, 96, 98 and 100 kHz the highs and lows occur at the same positions. Provided a length mode resonance frequency is not crossed, the spatial position of the highs and lows remains constant. In fact, in any given interval between two successive length modes, the spatial locations of the highs and lows are determined by the acoustic pattern of one of these two length modes, since it is this pattern that degenerates to provide the highs and lows between the two length modes. With reference to the 91 kHz plot and the higher frequency plots, the nine 'white stripe' highs of the 91 kHz plot degenerate in the higher frequency plots into five highs at the bottom of the ink cavity and four at the top.

Figures 8a) and 8c) are ink cavity peak acoustic pressure plots at generator operating

frequency when using the known ink cavity of Figures 5 and 6 (Figure 8a)) and the ink cavity according to the present invention of Figures 3 and 4 (Figure 8c)). Figure 8b)) is a repeat of Figure 3a), and is drawn in line between Figures 8a) and 8c) to enable the relative positions of the acoustic pressure peaks and troughs of Figure 8a) to be compared to the undulations of the walls of the body of ink in Figure 8b). It can be seen that interior faces 17, 19 of element 2 of the generator are arranged to undulate so that body of ink 49 has a minimum cross-sectional area 81 whereat there is a region of low acoustic pressure 73, and a maximum cross-sectional area 83 whereat there is a region of high acoustic pressure 71. The effect of this is that the regions of high pressure are expanded to reduce the pressure thereat, and the regions of low pressure are constricted to increase the pressure thereat. The result is an evening-out of the acoustic pressure along the line of nozzle orifices as shown in Figure 8c), resulting in the desired uniform jet break up.

The alternative ink cavity according to the present invention shown in Figure 9 is the same as that shown in Figures 3 and 4 with the exception that the cavity has a rectangular cross-sectional area rather than triangular. The design principle is the same, i.e. the walls 91, 93 of the cavity undulate sinusoidally in synchronism so that the cavity has a minimum rectangular cross-sectional area whereat there is a region of low acoustic pressure at the nozzle orifices, and has a maximum rectangular cross-sectional area whereat there is a region of high acoustic pressure.

A further disadvantage with the acoustic pressure pattern shown in Figure 8a) is that it is not possible to select a single drive voltage for piezoelectric driver 9 at which all jets meet the condition that they are satellite droplet free. The reason for this is that a given drive voltage does not 'appear' to have the same value at all nozzle orifices, because of the

variation in acoustic pressure along the nozzle orifices. Thus, it is possible to select a drive voltage to meet the satellite free condition for say all the nozzle orifices in regions of low acoustic pressure, but adjustment of this voltage to meet the satellite free condition for the nozzle orifices in regions of high acoustic pressure takes the voltage outside the range that  
5 meets the satellite free condition for the low acoustic pressure nozzle orifices. The evening-out of acoustic pressure at the nozzle orifices shown in Figure 8c) solves this problem.

The generator described by way of example is operated at a frequency between two successive length modes. As pointed out previously, between two such modes the regions of high and low acoustic pressure do not change their spatial locations. Thus, provided  
10 operation is kept between the two modes, satisfactory operation will be achieved. Indeed, operation is only limited by the room between the two length modes, which, with a typical ink and a 50mm long cavity, would be about 10 kHz. This affords a very stable generator that is highly tolerant of both inaccuracy in the structural dimensions of the generator, and stray in its operating parameters.

15 In the generator described above by way of example, the drive signal applied to the piezoelectric driver is assumed sinusoidal, single frequency. This generates sinusoidal variations in the acoustic pressure distribution in the ink cavity, and necessitates that the compensating variation in the cross-sectional area of the cavity be sinusoidal in nature. The use of an alternative form of piezoelectric drive signal would therefore require a  
20 corresponding alternative form of shape profile for the cavity walls, the precise nature of this profile in any given case being determined so as to compensate for, i.e. even-out, variation in acoustic pressure along the line of nozzle orifices.

A further advantage of the present invention is that unwanted acoustic variations

caused by other sources can also be compensated for or negated as long as they are of a constant form. For example, an actuator can be used not operating in a perfect vertical thickness resonance, i.e. having some amplitude and/or phase variation in the vibration. This can be accounted for in the cavity shaping. The foregoing allows the use of longer  
5 transducers that are difficult to make without some lateral variation in vibration amplitude and phase.

It is to be appreciated that the invention can be utilized in the context of a generator designed to operate with its cavity resonant in the vertical direction. If in such a generator the actuator is not operating in a perfect vertical thickness resonance as desired, the effect  
10 of this on the acoustic pressure distribution in the cavity can be compensated for by appropriate shaping of the cavity walls.

In the droplet generator described above by way of example, the invention is utilised in operation between two length modes. It is to be appreciated that even at a length mode frequency, appropriate variation in the cross-sectional area of the ink cavity along its length  
15 can be used to significantly 'flatten-out' acoustic pressure variation along the cavity.

In the above description there is present in a uniform cross-section ink cavity a standing wave the form of which is not as desired. This form is then tailored to improve it by varying the cross-sectional area of the cavity. In the description the tailoring is such as to achieve uniform jet break up. It can be imagined that the tailoring need not necessarily  
20 be such as to achieve uniform jet break up, but need simply be such as to achieve a desired jet break up profile along the line of nozzle orifices.

CLAIMS:

1. A droplet generator for a continuous stream ink jet print head comprising: an elongate cavity for containing the ink; nozzle orifices in a wall of said cavity for passing ink from the cavity to form jets, said nozzle orifices extending along the length of said cavity;  
5 and actuator means disposed on the opposite side of said cavity to said wall for vibrating the ink in said cavity such that each said jet breaks up into ink droplets, in operation of said generator a standing wave being present in the ink in said cavity, characterised in that the cross-sectional area of said cavity varies along its length in a manner so as to tailor the form of said standing wave in the cavity such that each said jet breaks up into ink droplets at a  
10 respective predetermined distance from said wall of the cavity.
2. A generator according to claim 1 wherein the tailoring of the form of said standing wave is such that each said jet breaks up into ink droplets at substantially the same predetermined distance from said wall of the cavity.
3. A generator according to claim 2 wherein the cross-sectional area of the cavity  
15 varies cyclically along its length between minimum and maximum values, said cross-sectional area having a minimum value whereat said standing wave has a region of low acoustic pressure at the nozzle orifices, said cross-sectional area having a maximum value whereat said standing wave has a region of high acoustic pressure at the nozzle orifices.
4. A generator according to claim 3 wherein said cross-sectional area varies  
20 sinusoidally along its length.
5. A generator according to claim 2 or claim 3 or claim 4 wherein said cavity has a generally triangular cross-section.
6. A generator according to claim 2 or claim 3 or claim 4 wherein said cavity has a

generally rectangular cross-section.

7. A method of operating a generator according to any one of claims 2 to 6 wherein the parameters of the operation of the generator are permitted to stray such that said cavity operates over a range extending substantially all the way between two successive  
5 resonances in the length of the cavity.
8. A method according to claim 7 wherein said parameters of the operation permitted to stray are ink composition and temperature.
9. A method of operating a generator according to any one of claims 2 to 6 wherein said cavity operates at substantially midway between two successive resonances in the  
10 length of the cavity.

Fig.1.

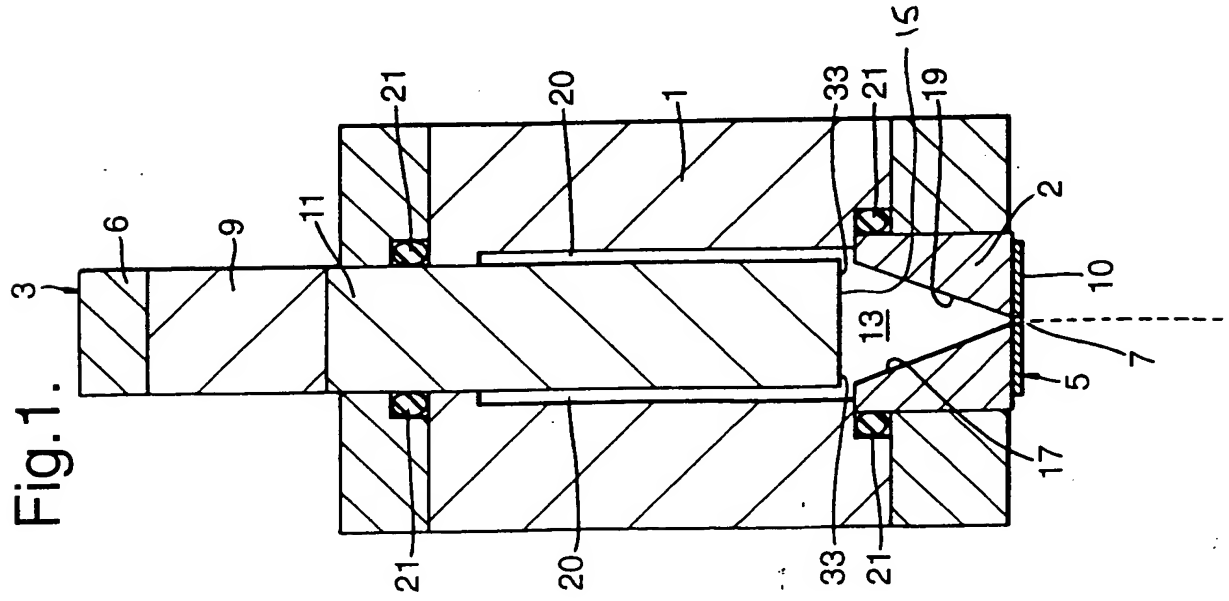


Fig.2.

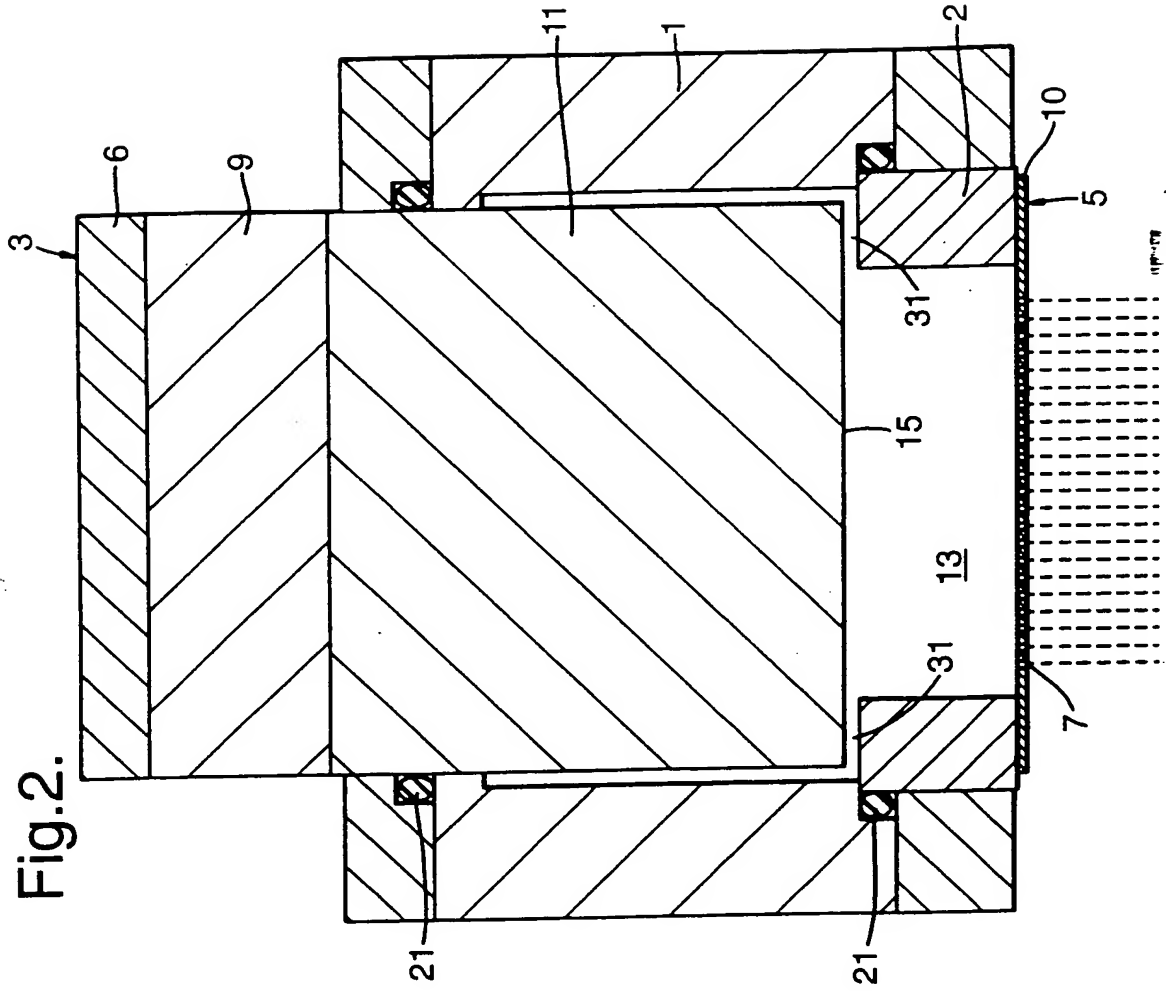




Fig. 3.

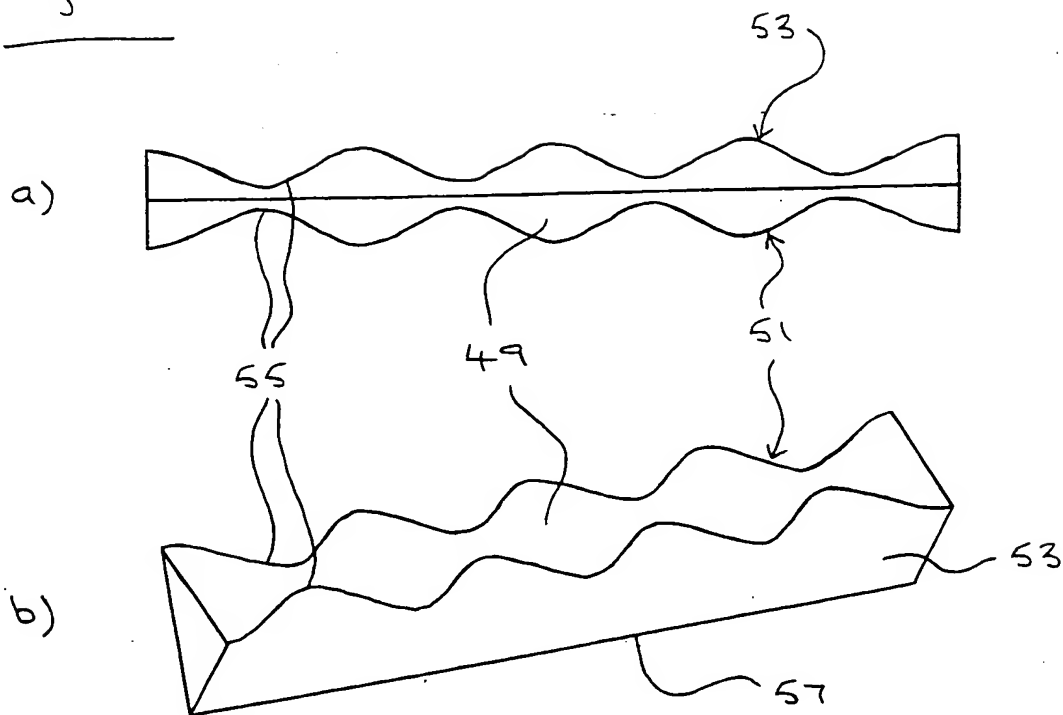


Fig. 4.

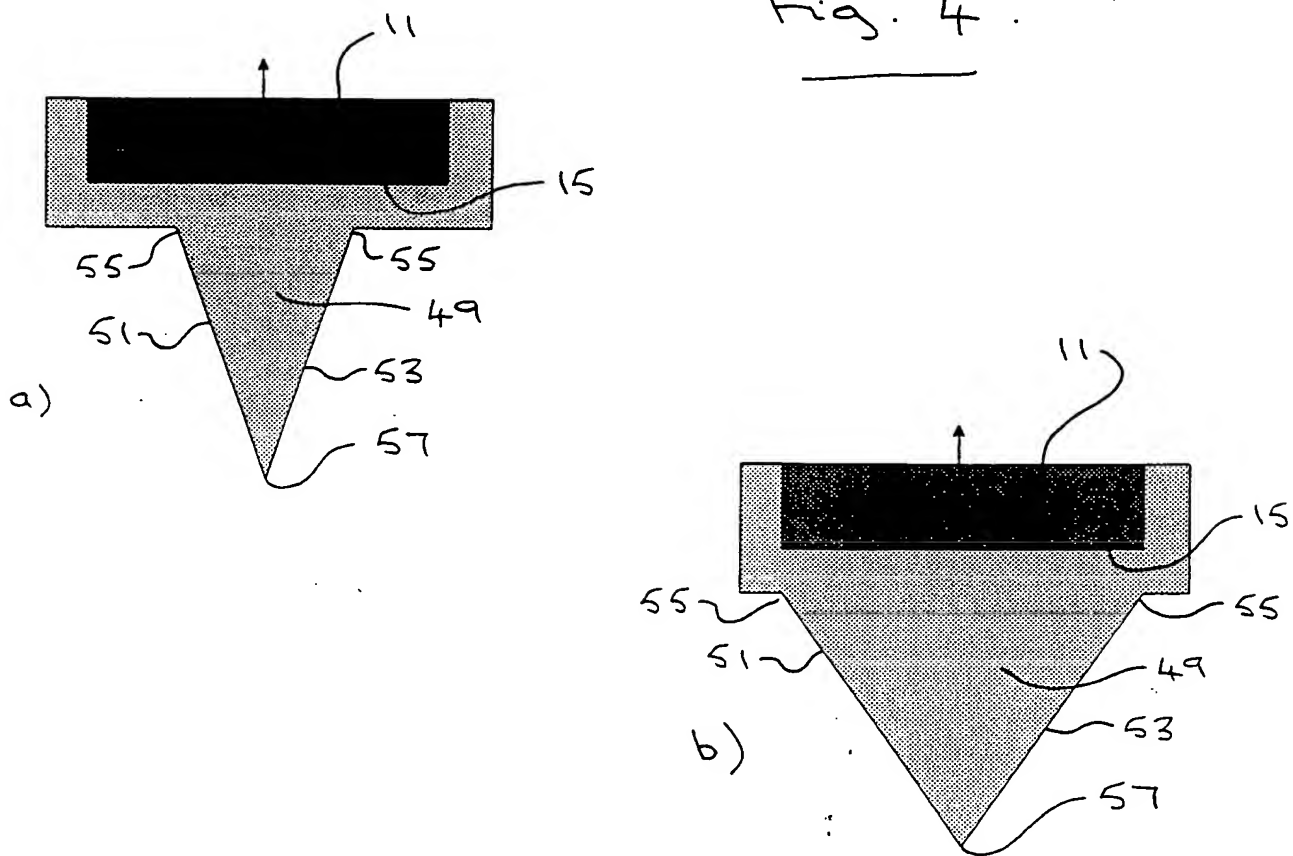


Fig. 5.

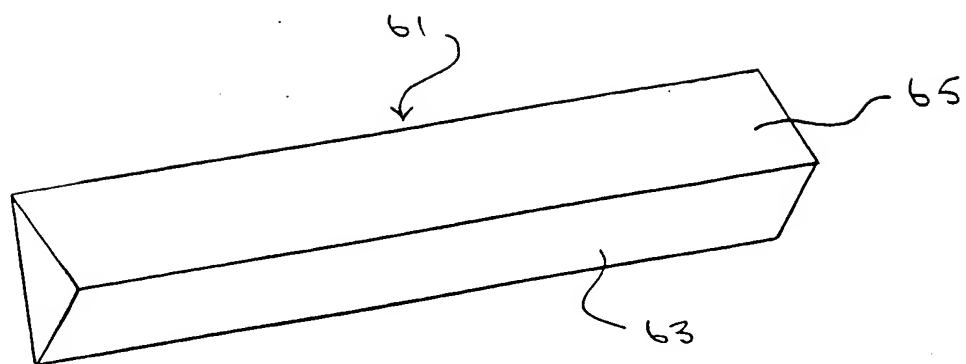


Fig. 6.

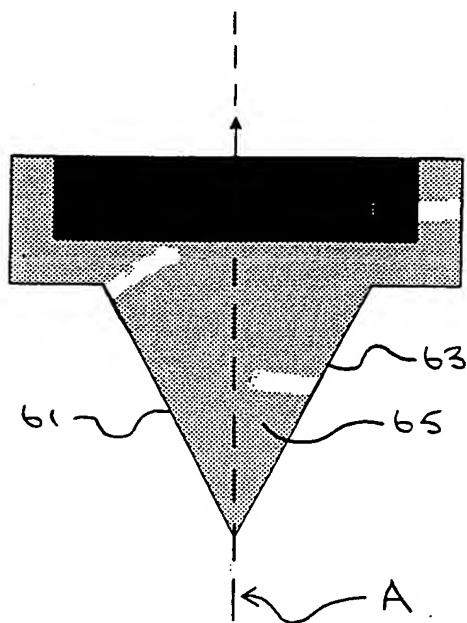


Fig. 9.



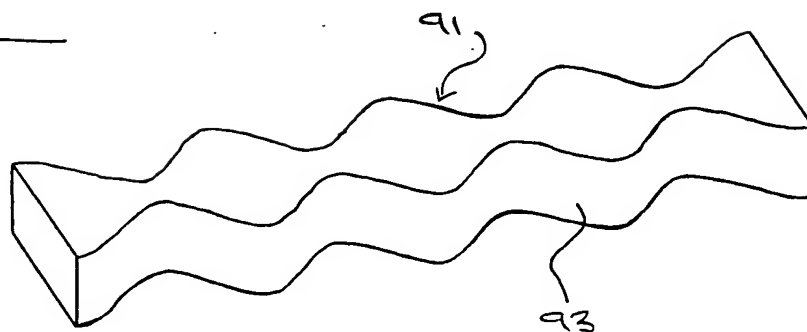



Fig. 7.

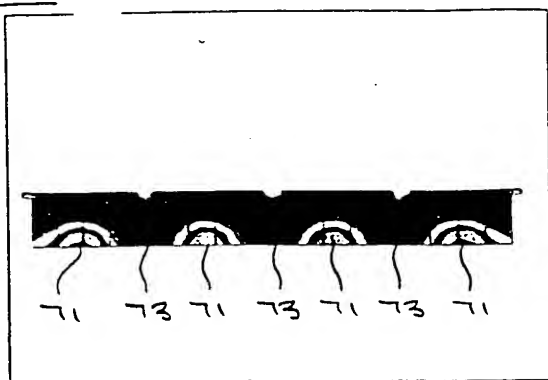


88kHz

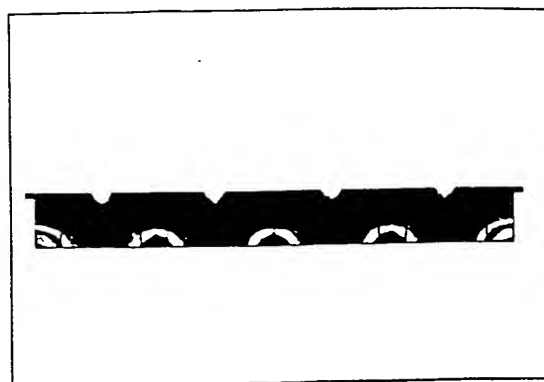


94kHz

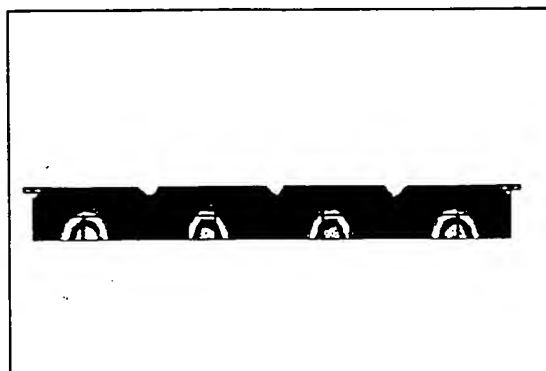


90kHz

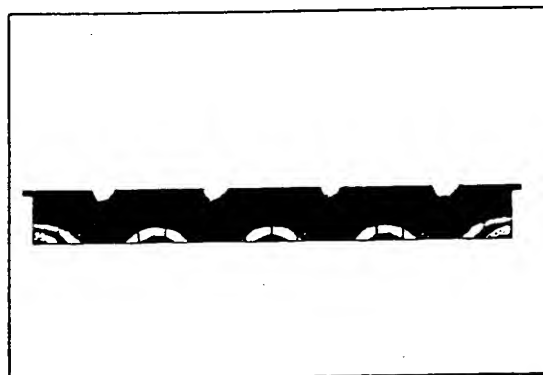


96kHz

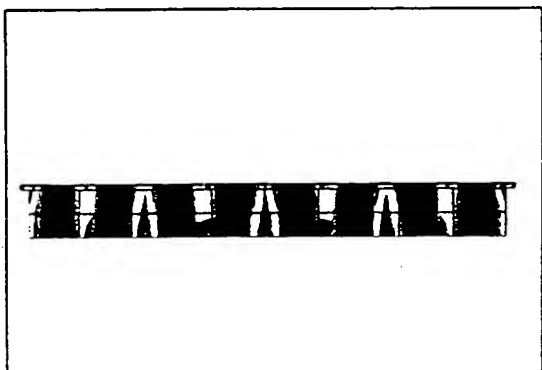


91kHz LENGTH MODE  
RESONANCE

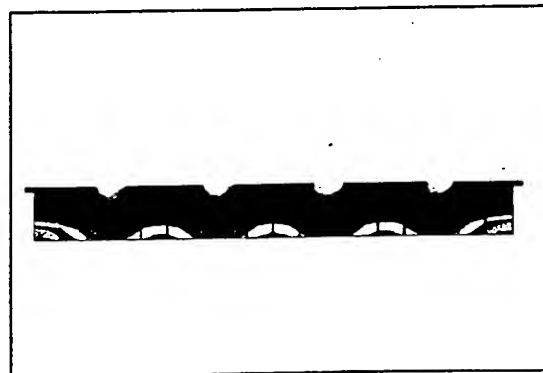

98kHz

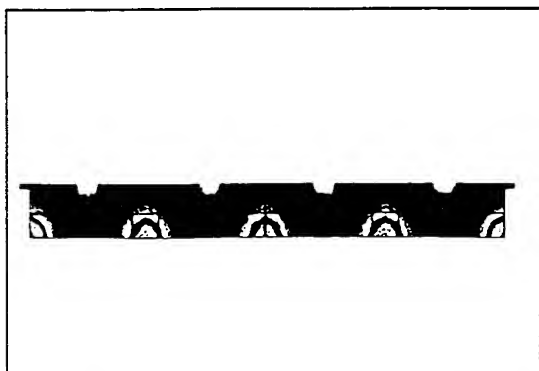


92kHz

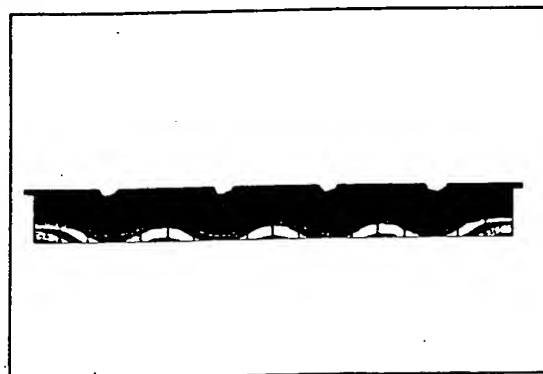


100kHz

Fig. 8

a)

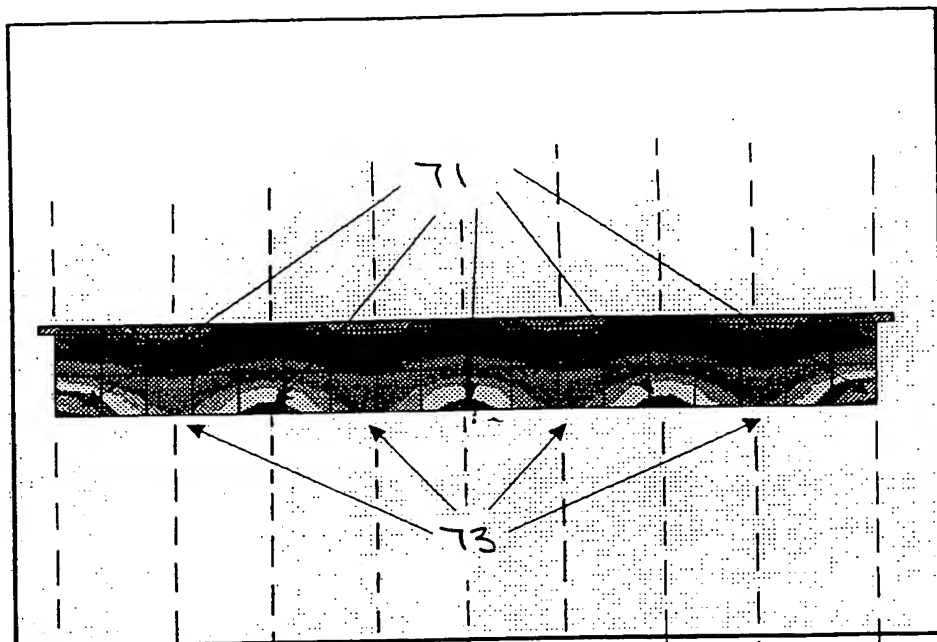

b)

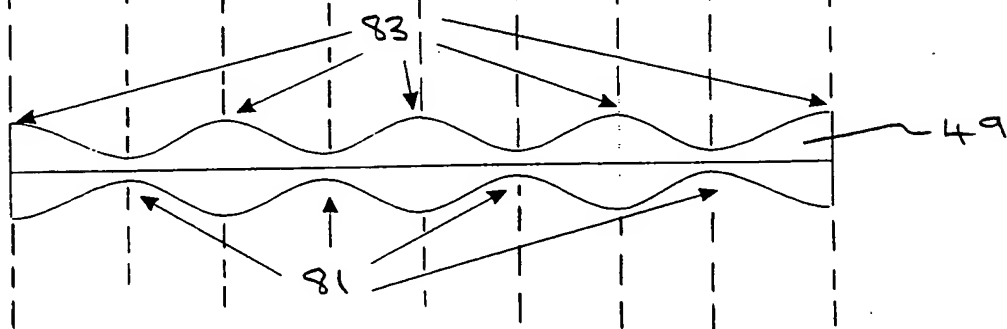

c)

